



Terminal User Guide

Connectivity Mode

Terminal Model: KD69 Soundbox



Connectivity Mode (GPRS)

Terminal Model: KD69 Soundbox



STEP 1 Press **M (More)** to enter the Soundbox menu



STEP 2 Press the **down arrow** to select **Others**



STEP 3 Press **2** to select **Connectivity Mode**



STEP 4 Press **1** to select **GPRS**



STEP 5 Please wait while the Soundbox is connecting to the telco sim card

Connectivity Mode (GPRS)

Terminal Model: KD69 Soundbox



STEP

6

Soundbox is
successfully
connected

Connectivity Mode (WiFi)

Terminal Model: KD69 Soundbox



STEP 1 Press **M (More)** to enter the soundbox menu



STEP 2 Press the **down arrow** to select **Others**



STEP 3 Press **2** to select **Connectivity Mode**




STEP 4 Press **2** to select **WiFi**



STEP 5 When this appears, set up Soundbox WiFi using your phone.

Connectivity Mode (WiFi)


Terminal Model: KD69 Soundbox

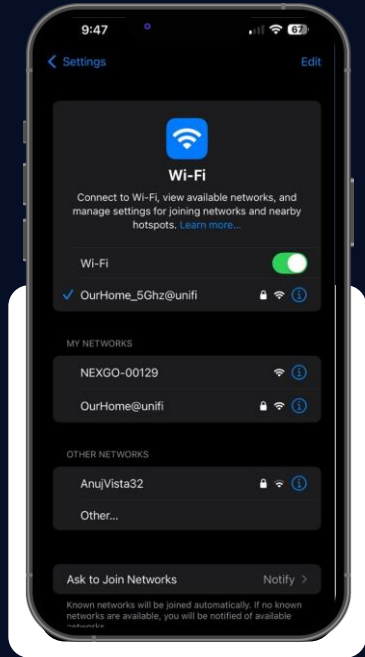

STEP 6 Go phone's WiFi settings, connect to "Nexgo WiFi" and enter the last 4 digits of the Soundbox serial (at the back).



STEP 7 Choose your preferred WiFi for the Soundbox

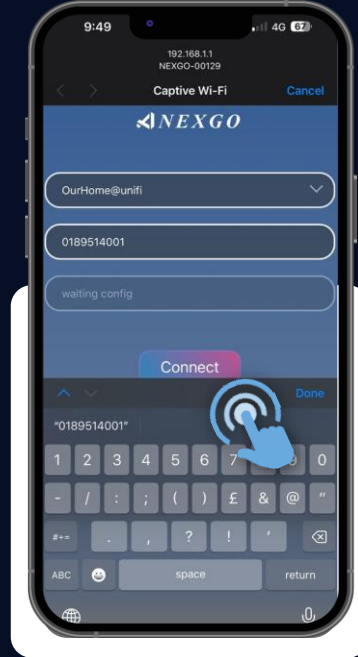

STEP 8 Enter the WiFi password and press **Connect**



STEP 9 Soundbox is successfully connected to WiFi